


东芝负载开关用于NB-IOT



框图

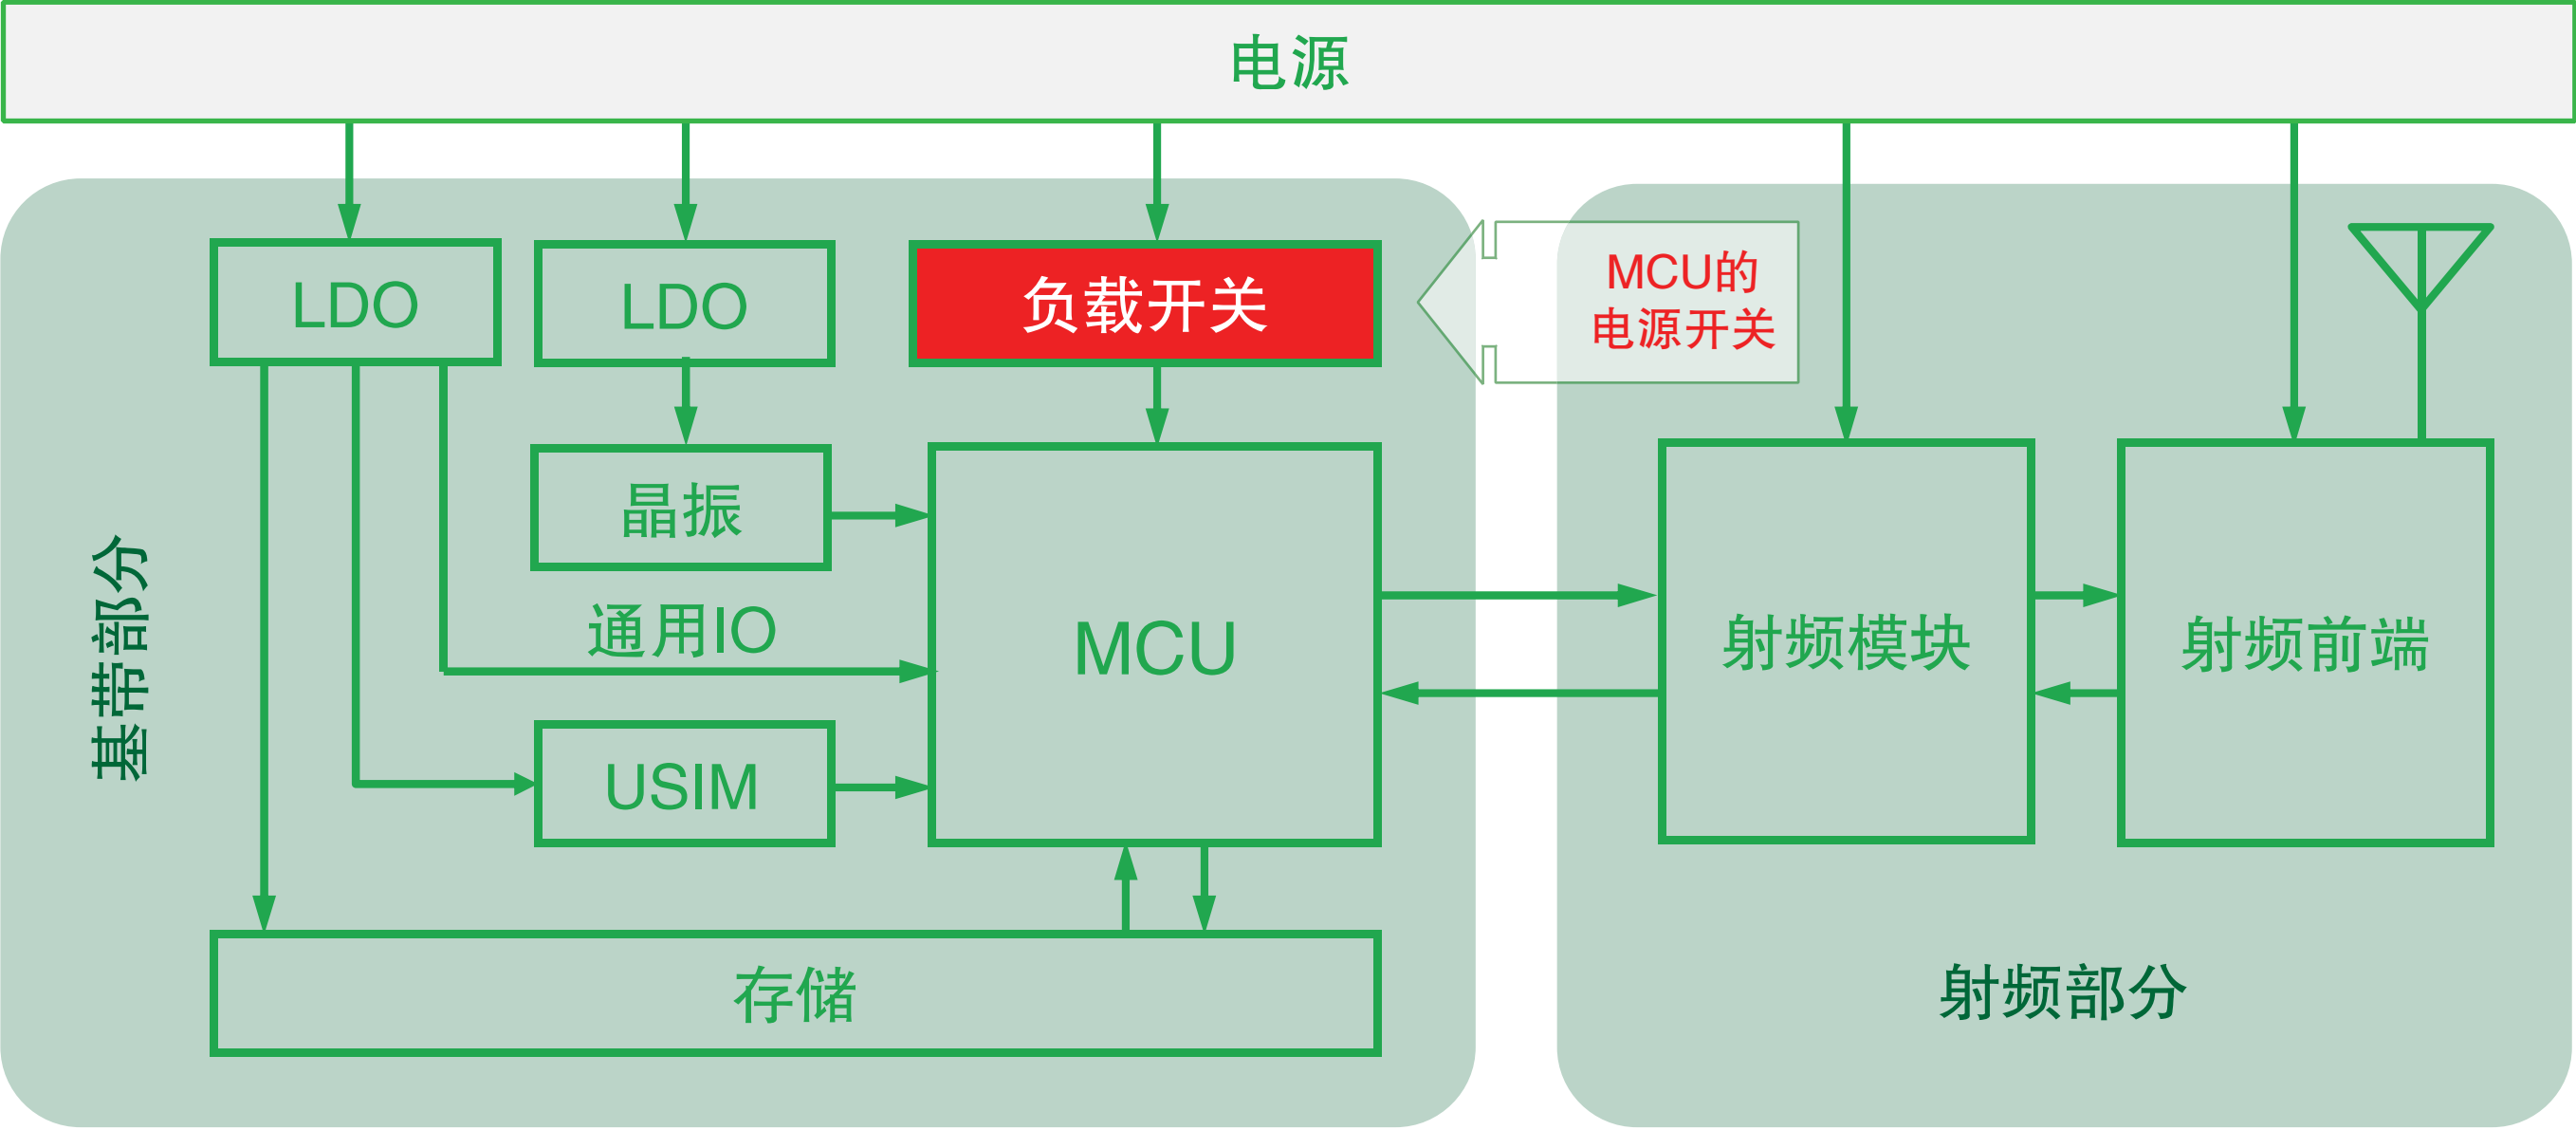

优势

- 小封装
- 低导通电阻
- 低功耗
- 低导通电阻

Part Number	Package Size (mm)	VIN (V)	IOUT DC (A)	RON (mΩ)		IQ typ. (uA)	Slew Rate (μs)	Control active	Dis-charge	RCB
				1.1V	5.0V					
TCK106AG	WCSP4D 0.8 × 0.8	1.1~5.5	1	176	34	0.11	130	High	–	–
TCK107AG								High	✓	–
TCK108AG								Low	✓	–
TCK111G	WCSP6C 1.0 × 1.5	1.1~5.5	3	8.5	8.3	69	500	High	–	✓
TCK112G								High	✓	✓
TCK206G	WCSP4C 0.9 × 0.9	0.75~3.6	2	18.2	–	22	240	High	–	✓
TCK207G								High	✓	✓
TCK208G								Low	✓	✓
TCK301G	WCSP9 1.5 × 1.5	2.3~28	3	–	73	130	2000	High	–	✓
TCK302G										
TCK303G										

